

H FA-





HZFA-V



—

—

—



AC220V ± 20

15A



CT/PT

PT

CT

PT

/



CT/PT

“

”

“ 5

10

15

”

“

”

“

”

“

”

“

”

“

”

“

”

220V

1000V

600A

50-60Hz

0.15V

2000


/

RS232

U

20Kg

CT	220V	0—1000V	20A	3KVA	< 0.5%
PT	220V	0—330V		3KVA	< 0.5%
CT	220V	0-8V	0—600A	———	< 0.5%
PT	220V	0—1000V	———	———	< 0.5%
CT	999.9K:5/1				< 0.5%
PT	999.9K:100 150 100/3 100/√3				< 0.5%
	0-20				< 0.5%
	0.01	± 5		0.01%	<0.5%
	0-200A	5		0-1000V	5
	-10 55			AC220V ± 20	50HZ
	350 × 240 × 270			20Kg	

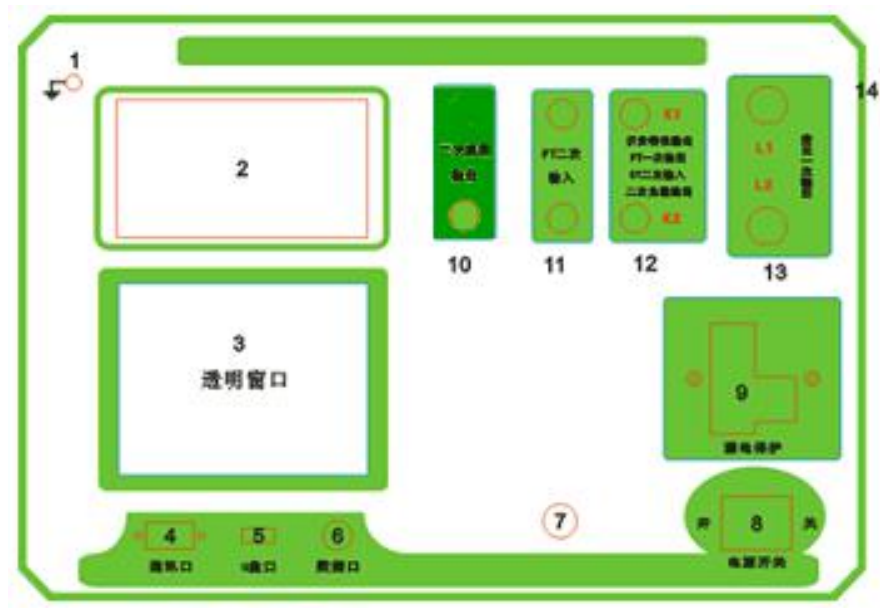

1 2 3
4 PC 5 U 6
7 8 9 +
10 11 PT
12 / /PT / CT
13 CT 14. 220V ± 10

“ ” “ ” “ ”

“ ”



220V

CT PT U

全功能互感器综合测试仪

CT 测试

PT 测试

数据查询

U盘转存

系统设置

08-12-28 15:30

CT

CT

CT

A.

CT 参数设置

编号: ABC001

相序: A

Kn: 1

变比: 1000:5



确定

:

CT




赫兹电力
HERTZ POWER

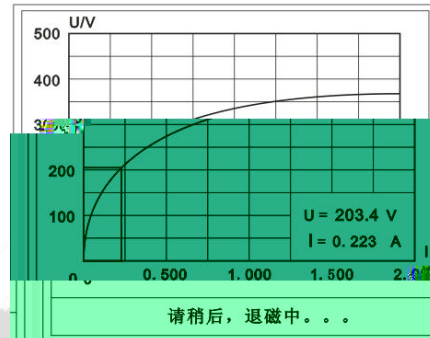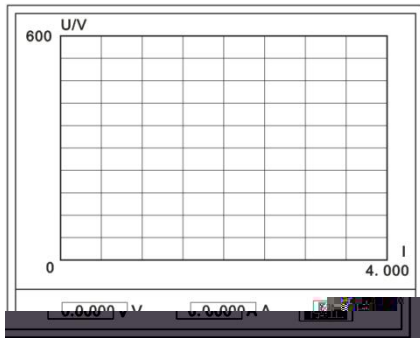

d.

()

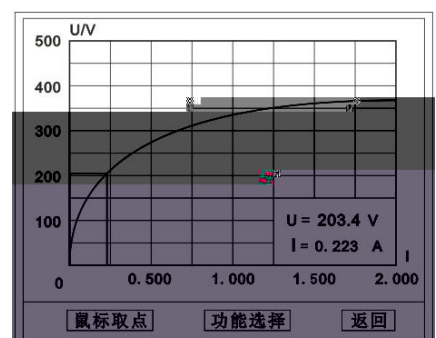



5 10 15

CT

CT

CT 变 比 测 试	
一次输出电流 600A	自动试验
	误差试验
	二次回路
返回上层	

a.

0 - 600 A

1 5 20 100 120

5 200A



CT

b.

CT

L1 L2

CT

K1 K2

c.



一次侧: 400.0 A	
二次侧	0.400A
比值	5.000K:5
角差	1.83'
比差	0.00%
极性	同相/-

CT 误差试验		
	角差	比差
1%	40.3'	1.30%
5%	12.6'	0.30%
20%	1.32'	0.00%
100%	0.83'	0.00%
120%	5.25'	0.20%


一次侧: 400.8 A



e.

5

200A

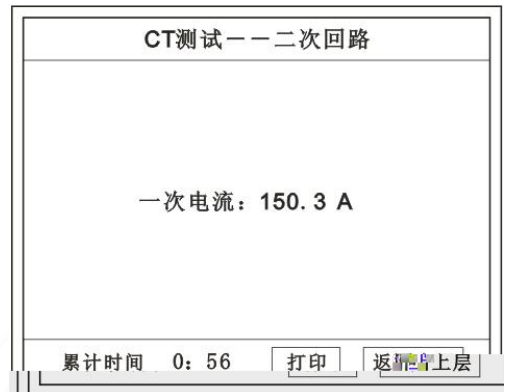

E.



4. PT

PT



PT

PT

CT


CT

A. PT



PT

PT

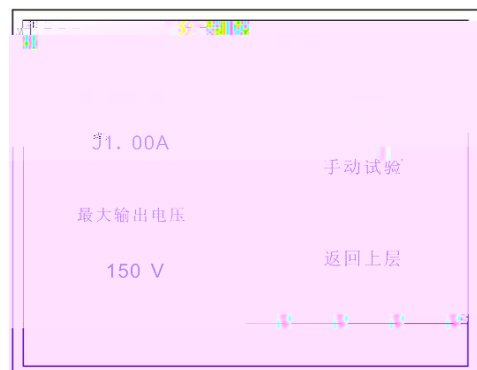



a.



0 - 3 A



0~330V



b.

B. PT

PT 变比测试	
自动试验	
一次输出电压 1000V	二次侧止
返回上层	

a.



0 - 1000



5

b.

一次电压: 1000 V	
二次侧	5.000V
比值	20.00K:100
角差	1.83'
比差	0.00%
极性	同相/—
保存 打印 返回	



PT

a x

c.

5 1000V

PT测试——二次耐压

一次电压: 1000 V
绝缘电流: 0.001 V

累计时间 1: 00

5.

CT

PT

A. CT

a.



b.



数据查询

请输入:
编号: ABC001
日期: 09 年 5 月 1 日

确定 取消

N	编号	相序	Kn	时间	类型
1	ABC001	A		09-05-01-15:23	变比
2	ABC001	A	1	09-05-01-15:23	变比
3	ABC001	A	1	09-05-01-15:23	伏安
4	ABC001	A	2	09-05-01-15:23	伏安

后页 查看 返回







1%Y=U





U



U

7.

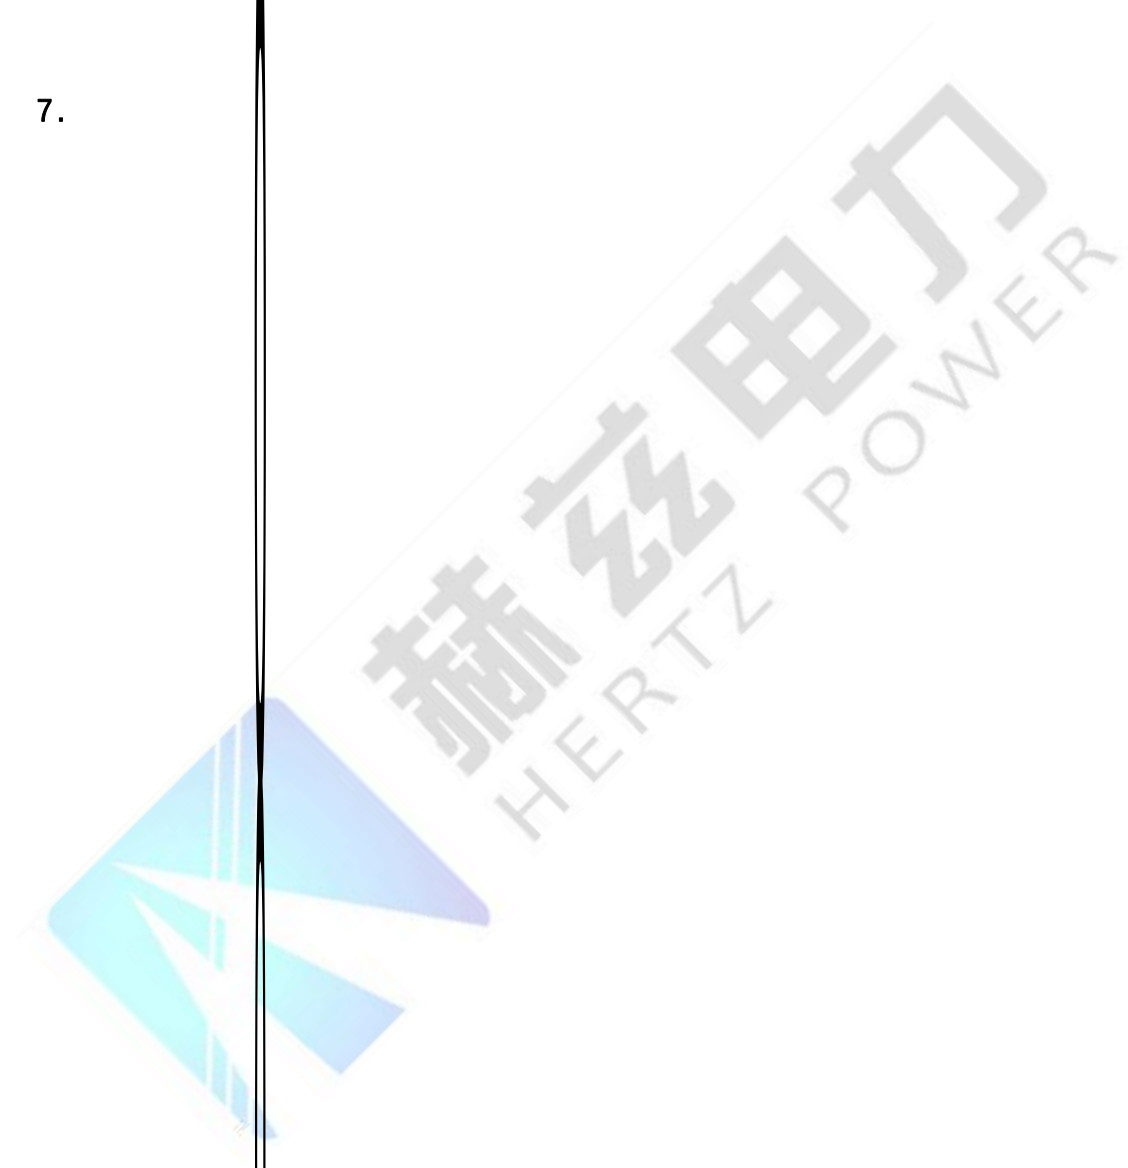

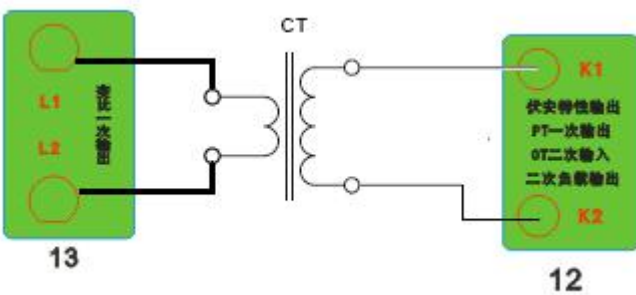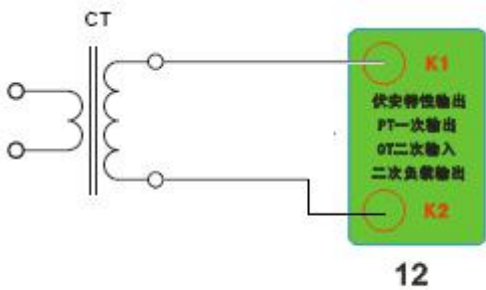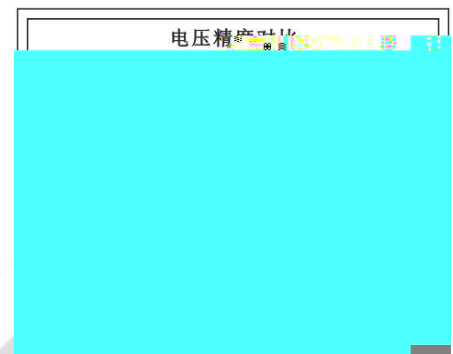

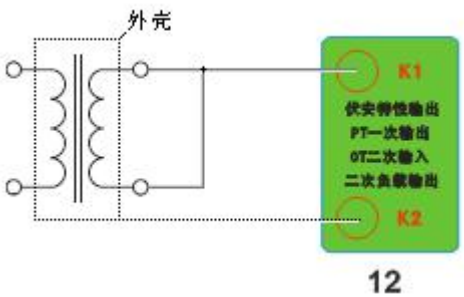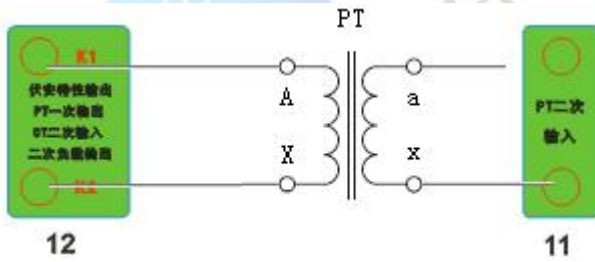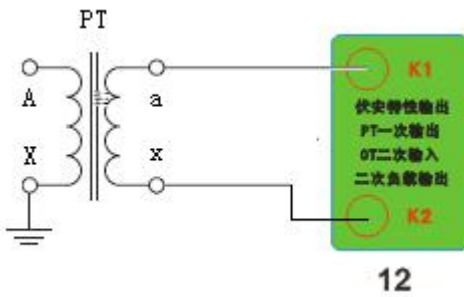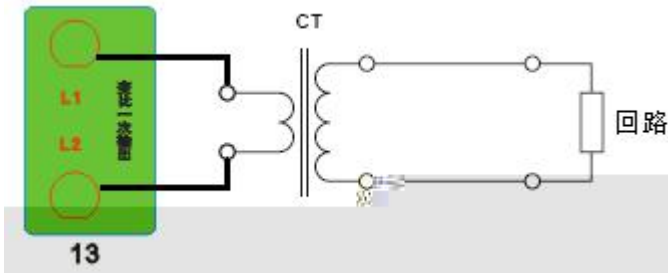

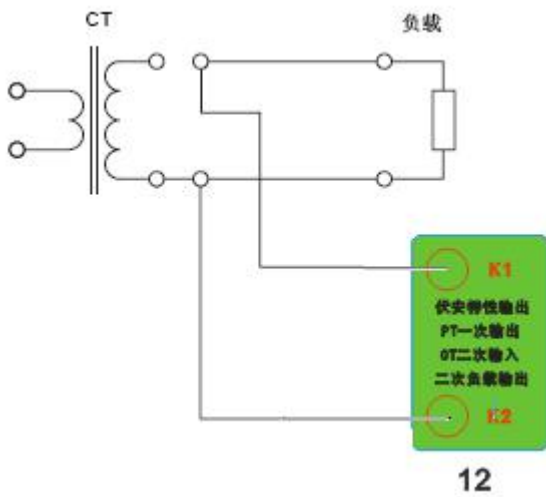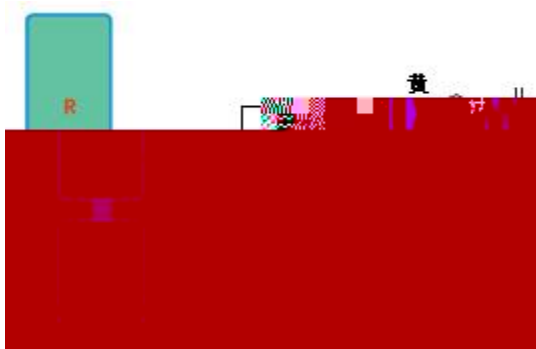



“

”

“

”

1

2

1.

2.



1

2

3

2

24

027-83267669

24

48

4