









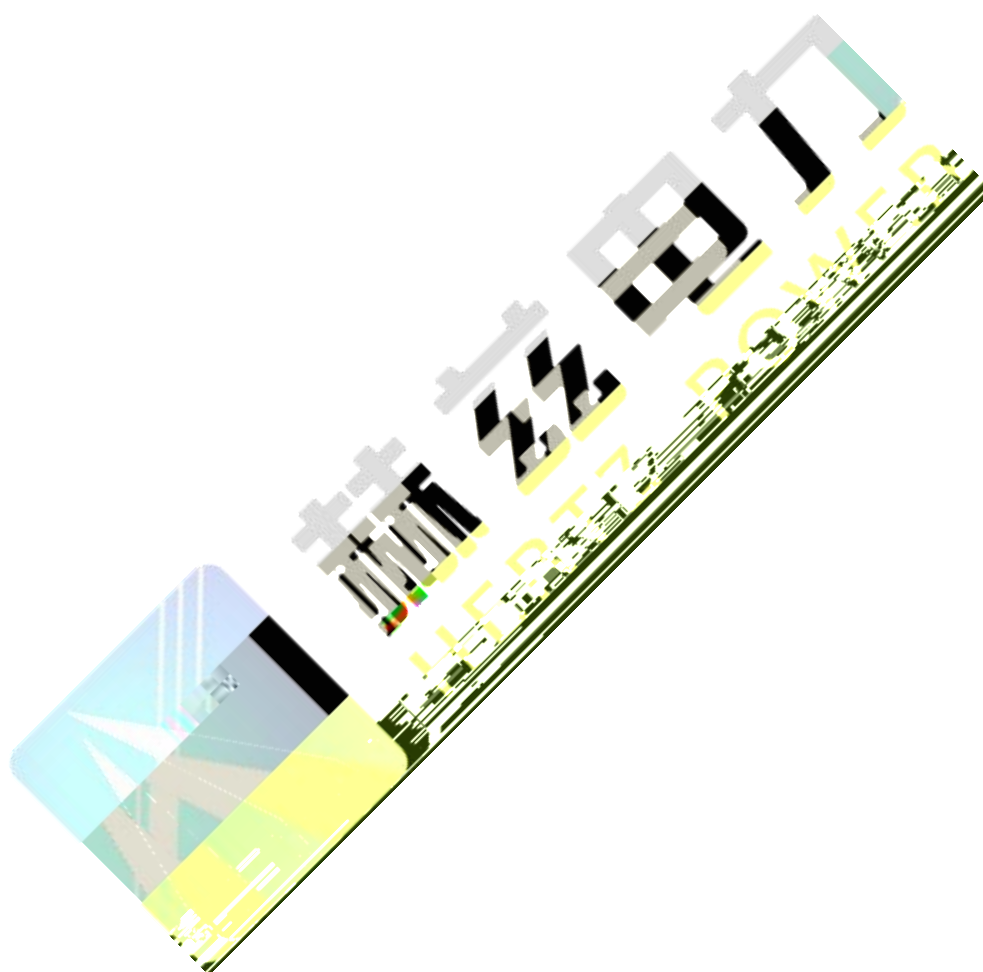

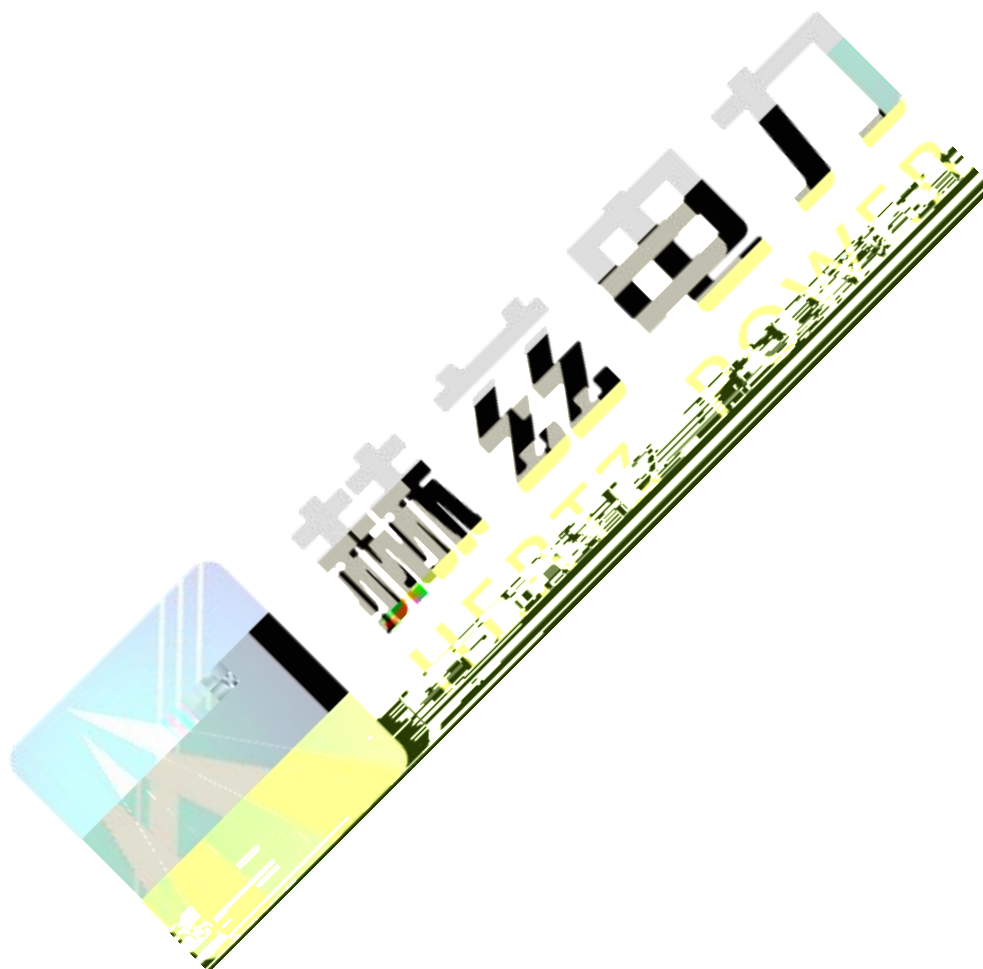

服务宗旨：快速响应，达到满意，超过期望

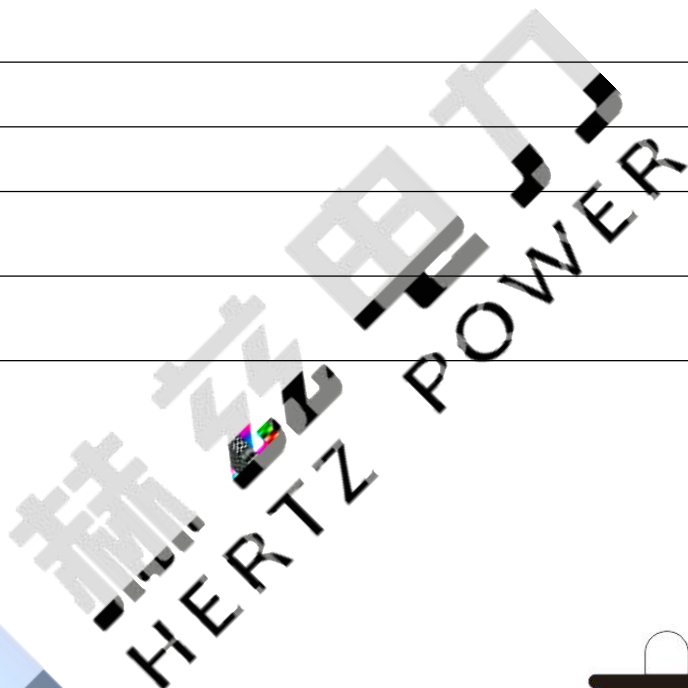
[illegible]

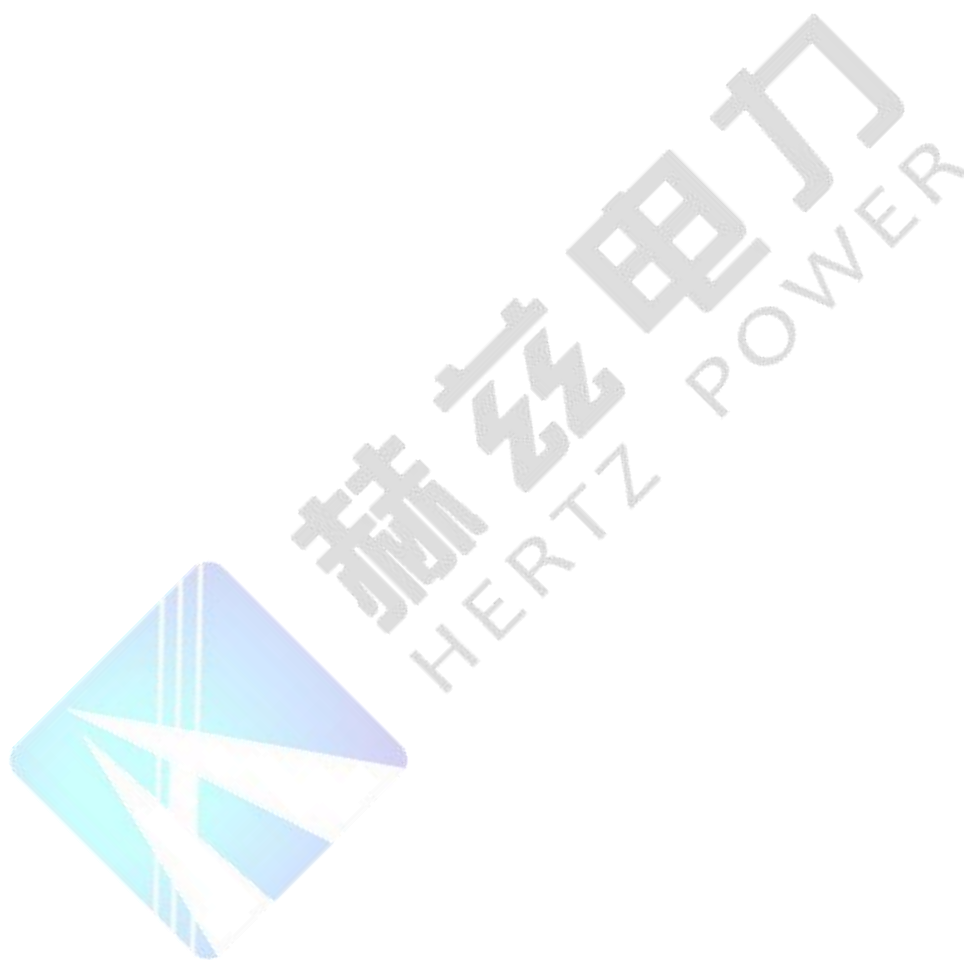





自动试验		参数设置	
试验电压	60.0	kV	
保护电压	66.0	kV	
保护电流	2.000	mA	
耐压时间	0 m 10 s		
升压速度	快		
启动		返回	

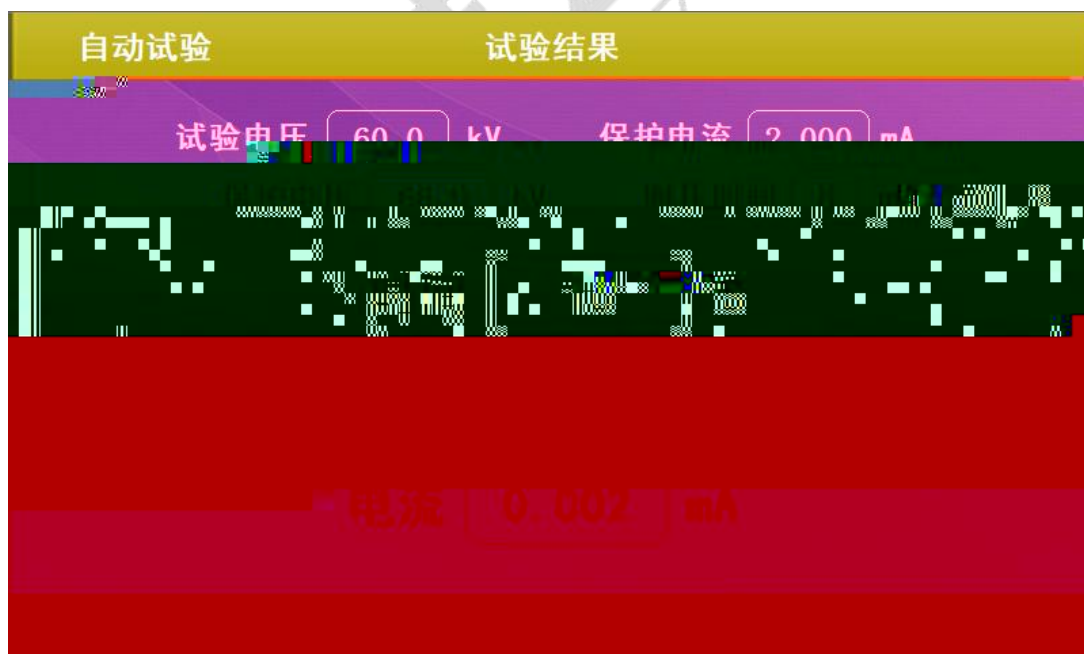






避雷器试验	试验结果
U1mA电压	35.0 kV
I1mA电流	1.002 mA
U0.75电压	26.3 kV
I0.75电流	0.002 mA

存储 返回 打印

阶段试验	参数设置
1阶段	10.0 kV 10 S
2阶段	20.0 kV 10 S
3阶段	30.0 kV 10 S
4阶段	40.0 kV 10 S
5阶段	50.0 kV 10 S
6阶段	60.0 kV 10 S
保护电压	60.0 kV
保护电流	2.000 mA
升压速度	快

启动 返回

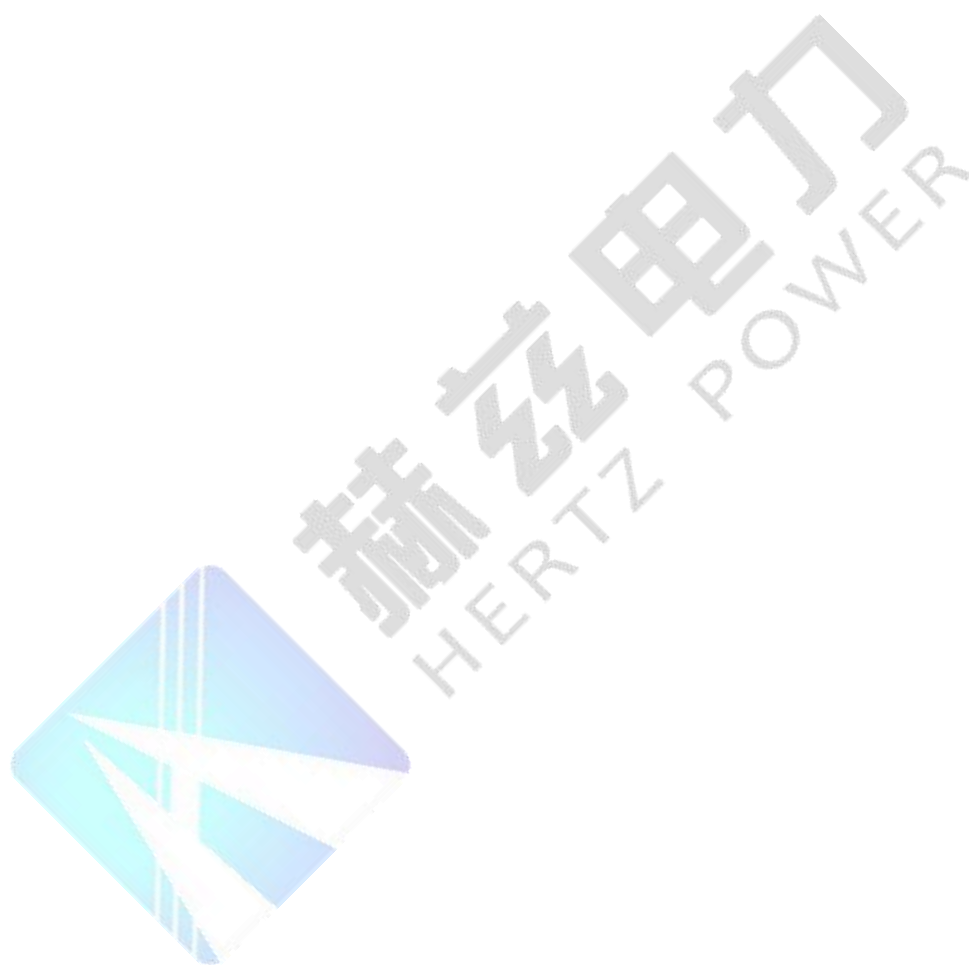




服务宗旨：快速响应，达到满意，超过期望

2022 年 3 月 11 日 14 时 32 分


保存 返回



测电缆

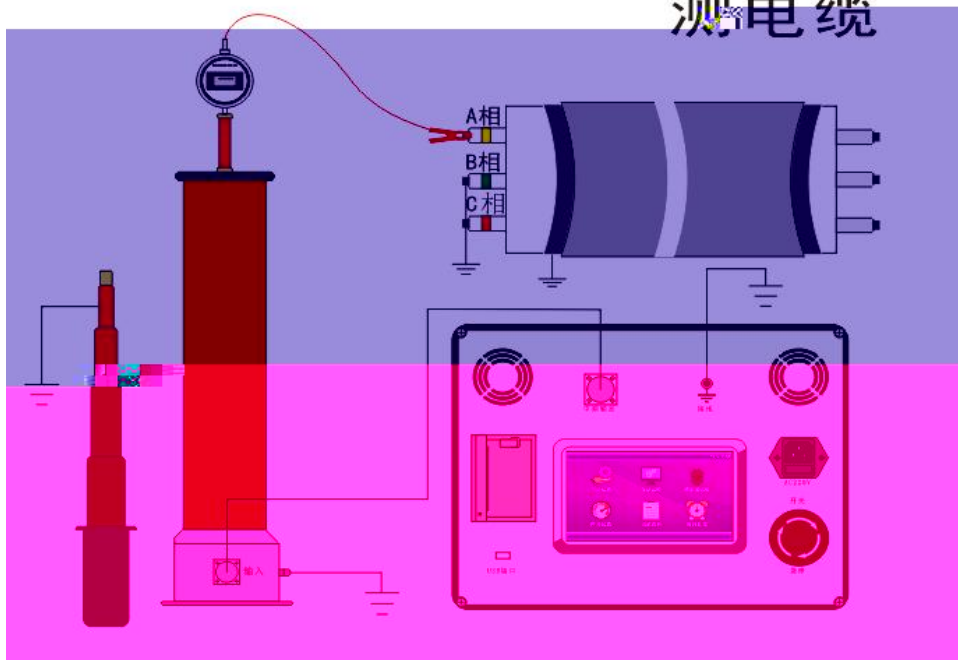


测变压器

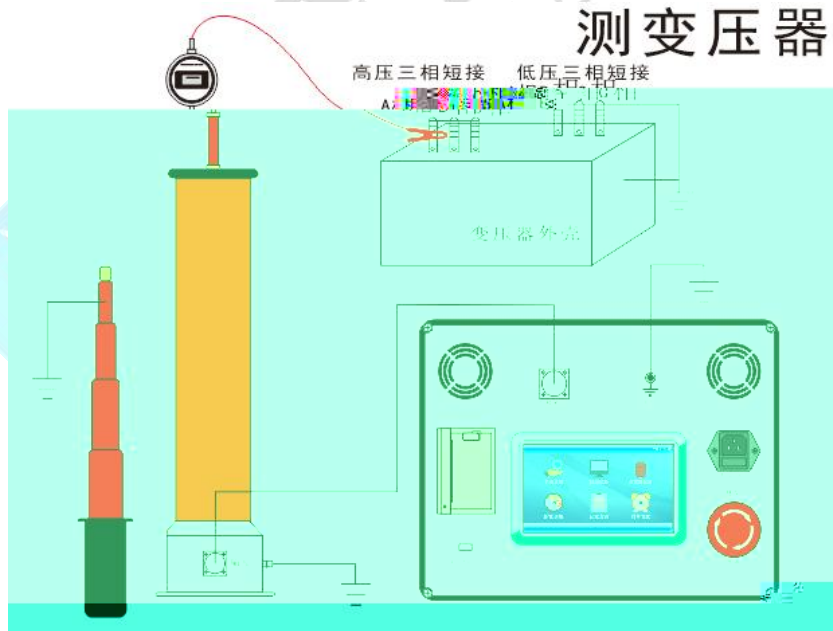



测氧化锌

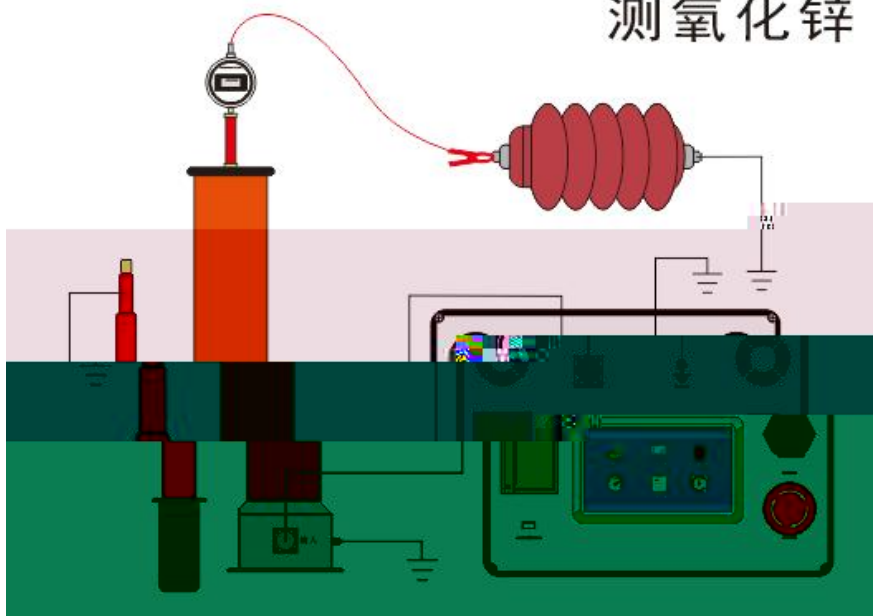

测发电机

